

UltraNeo 339

DESCRIPTION AND GENERAL PROPERTIES

- **Material** Neoprene
- **Length (cm)** 35.5
- **Thickness (mm)** 1.35
- **Wrist** Scalloped cuff
- **Colour/Color** Black
- **Interior finish** Textile support
- **Exterior finish** Pebbled
- **Size / EAN** 9 10
- **Packaging** 1 pair/bag - 6 pairs/carton
- **Complementary information** Guaranteed without silicone



PERFORMANCE RESULTS

Certification category 3

CE 0334



X1XXXX

Type A



ABCJLMNS




3121X

Legends

EN 388 MECHANICAL HAZARDS




PERFORMANCE LEVELS

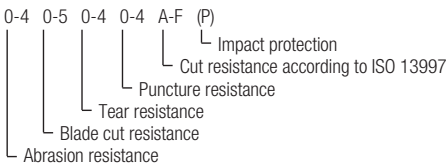

EN 407 THERMAL RISKS heat and fire



PERFORMANCE LEVELS

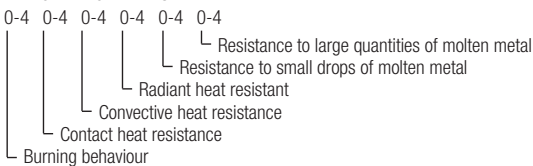

CHEMICAL RISKS

EN ISO 374-1 Type A



U V W X Y Z

- A Methanol
- B Acetone
- C Acetonitrile
- D Dichloromethane
- E Carbon Disulfide
- F Toluene
- G Diethylamine
- H Tetrahydrofurane
- I Ethyl acetate

EN ISO 374-1 Type B



X Y Z

- J n-Heptane
- K Sodium hydroxide 40%
- L Sulphuric acid 96%
- M Nitric acid 65%
- N Acetic acid 99%
- O Ammonia 25%
- P Hydrogen peroxide 30%
- S Hydrofluoric acid 40%
- T Formaldehyde 37%

EN ISO 374-1 Type C



CUT RESISTANCE

- | | | |
|-------------|-------------|-------------|
| A1 ≥ 200 G | A4 ≥ 1500 G | A7 ≥ 4000 G |
| A2 ≥ 500 G | A5 ≥ 2200 G | A8 ≥ 5000 G |
| A3 ≥ 1000 G | A6 ≥ 3000 G | A9 ≥ 6000 G |

MICRO-ORGANISMS

EN ISO 374-5



Protection against bacteria, fungi

EN ISO 374-5




Protection against bacteria, fungi, virus

VIRUS



COLD HAZARDS

PERFORMANCE LEVELS



RADIOACTIVE CONTAMINATION

For more details: www.mapa-pro.com

MAPA[®]
PROFESSIONAL

SPECIFIC ADVANTAGES

- Superior chemical resistance against acids and alkalis, such as concentrated hydrofluoric acid, oils, and greases, due to its 100% neoprene multi-layer construction
- Pebbled embossing, for better grip on wet and slippery objects
- Excellent mechanical resistance and longer service life, due to the textile support and the thickness of the glove
- Thermal insulation from the cotton-knit lining for handling hot liquids
- Previous name: ChemZoil 339

MAIN FIELDS OF USE

Mechanical industry

- Surface treatment of metals (acids)

Chemical industry

- Site pollution control
- Resin-working
- Hot, petrochemical product sampling
- Handling on alkylation units
- Handling and transporting drums of chemical products

INSTRUCTIONS FOR USE

Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use at workplace may differ from the "CE"-type tests.
- Persons sensitized to dithiocarbamates should not use these gloves.
- Inspect the gloves for any defect before use.
- Put the gloves on dry, clean hands.
- Do not use the gloves in contact with a chemical for a duration in excess of the measured breakthrough time. Refer to the website www.mapa-pro.com or contact the Technical Customer Service - MAPA PROFESSIONNEL (stc.mapaspontex@mapaspontex.fr) in order to know this breakthrough time. Use 2 pairs alternatively when in long duration contact with a solvent.
- Turn the cuff end down in order to prevent a hazardous chemical from dipping onto the arm.
- Inspect the gloves for cracks or snags before reusing them.

Storage conditions

- Store the gloves in their original packaging at a temperature not below 5°C.

Laundering conditions

- Before taking off the gloves, clean them as appropriate :
- in use with paints, pigments and inks : wipe with a clean cloth dampened with a suitable solvent, and rub over with a dry cloth
- in use with a solvent (diluents, etc...) : rub over with a dry cloth
- in use with acids and alkalies : thoroughly rinse the gloves under running water, and rub over with a dry cloth
- Caution : improper use of the gloves or submitting them to another cleaning or laundering process which is not specifically recommended can alter their performance levels.

Drying conditions

- Ensure the inside of the gloves is dry before reusing them.

LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- **UE type certificate or CE type examination certificate** : 0075/014/162/12/18/2912
- **Issued by the notified body nr** : 0075 - C.T.C - 4 rue Hermann Frenkel-69367 Lyon cedex 07-France
- **Quality assurance certificat** : 0334 - Asqual 14 rue des Reculettes -F-75013 PARIS